

Mobile and industry application battery
MEDES Flat NMC G2



Mobile and industry application battery

MEDES Flat NMC G2


- Designed for heavy duty application
- Liquid thermal management system
- Modularity
- Homologated: UN ECE R100.02 and UN ECE R10.05



Technical specification:

Nominal voltage	333 V
Discharge current	100 A
Maximum discharge current (10s)	300 A
Discharge temperature range	-30°C +55°C
Charge current	100 A
Maximum charge current (10s)	200 A
Charge temperature range	0°C +55°C
Nominal energy	34 kWh
Protection class	IP66
Thermal Management System	Liquid
Homologation	UN ECE R100.2 UN ECE R10.5
Energy density	207 Wh/l 140 Wh/kg

Dimensions:

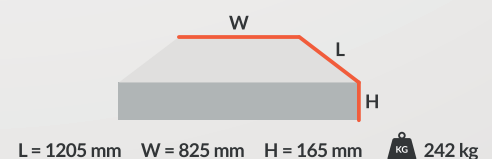

ELE-DRIVECO SP. Z O.O.

Aleje Jerozolimskie 475
 05-800 Pruszków, Polska

TÜV Certificate: ISO 9001:2015